




INFINITY SMUS

High Performance Multi-Application System

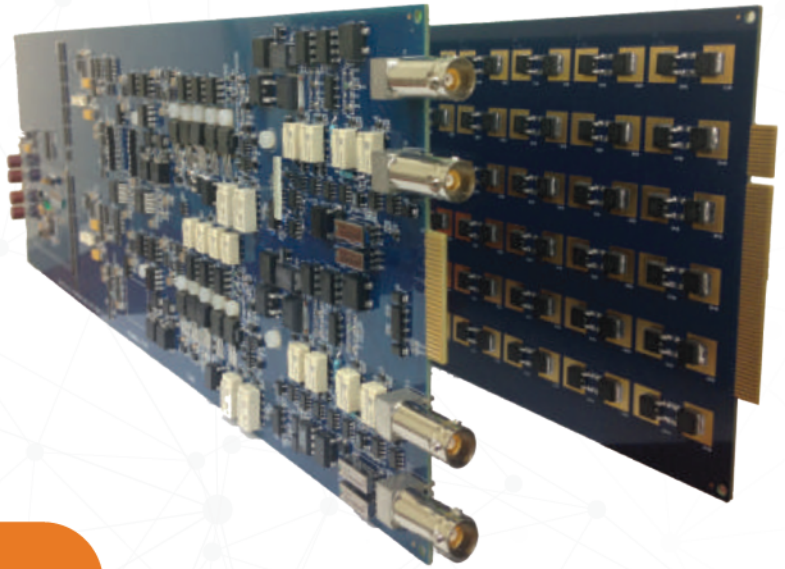


48 Source Dual Channel SMU Advantages:

- Supports HCI, NBTI, OTF, and TDDB applications.
- High-capacity parallel system with hundreds of devices per system (768 voltage sources per analog box).
- Fast measurement speed—under 100 μ s per sample point.
- Microcontroller-based system allows for faster measurements.
- Low leakage system—typically under 10 pA.
- Field-proven with installations at most major semiconductor companies worldwide.

Dual Channel SMU

- Up to 24 sources per card
- Patented stress/monitor architecture
- High throughput

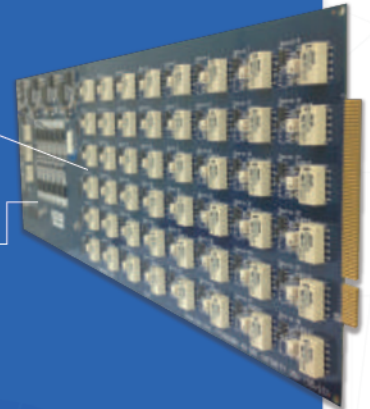

SMU TYPE	Max Current/Source	Sources/SMU
10 Volt	30mA	48

Consult QualiTau for detailed specifications.

TESTING THE FUTURE

SALES@QUALITAU.COM