



AGE

Pulsed Electromigration System



SYSTEM HIGHLIGHTS


- 32 individual ovens, each with a 28-pin ZIF socket.
- 64 DUT capacity with DC and unipolar capabilities.
- 32 DUT capacity with full pulse capabilities, up to a non-symmetric bipolar pulse.
- Independent controls for each module of 8 sockets, including:
 - Stress frequency
 - Stress duty cycle
- Independent controls for each single sockets oven, including:
 - Up to 350°C.
 - 2 current sources per oven
 - Independent connectivity matrix to support any bonding diagram
- Compact desktop desing
- 5MHz Capable

OVEN CHARACTERISTICS



• Jumper matrix area

ZIF Socket provides easy load and un-load of packages

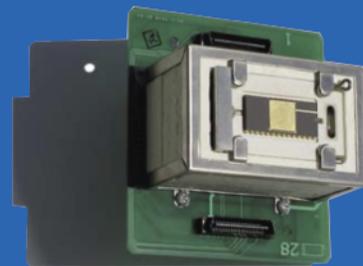

Consult QualiTau for detailed specifications.

TESTING THE FUTURE

SALES@QUALITAU.COM